635nm, Red Laser Module



Application

Industrial areas / Medical / Biochemical / Laser Tag

Property

Wavelength Range = 635nm (others optional)

Introduction


Egismos created the smallest laser module in market. With its size of just 4*10mm this laser module is smaller than some laser diodes making it perfect solution for applications where dimensions and price are priority.


Specifications (T=25℃)

Items	Symbols	S436351D, S436355D	H436351D, H436355D
Mode		CW	CW
Wavelength	λ	635nm	635nm
Lens		PMMA	PMMA
Spot	D/R	Dot	Dot/Round
Sot Size	D	<10x 20mm at 10m	<10x18mm at 10m
	R		<10mm round at 3m
Diameter x Length	Φ x L	4.5x16mm	4x10mm or 4.5x16mm
Output Power	Po	<1mW, <5mW	<1mW, <5mW
Power Stability		<10%	<5%
Divergence Angle	mrad	<1	<0.7
Operating Voltage(DC)	Vo	3V	3V
CW Operating Current	Io	25~30mA, 40mA max(5mw)	25~30mA, 40mA max(5mw)
Operating Temperature	To	-10℃~ +40℃	-10℃~ +50℃
Storage Temperature	Ts	-40℃~ +85℃	-40℃~ +85℃
Housing Material		Aluminum	Aluminum
Mean time to failure		>5000 hrs	>8000 hrs

EGISMOS
www.egismos.com
tel:+1-360-3893347
sales@egismos.com


Outline Dimensions

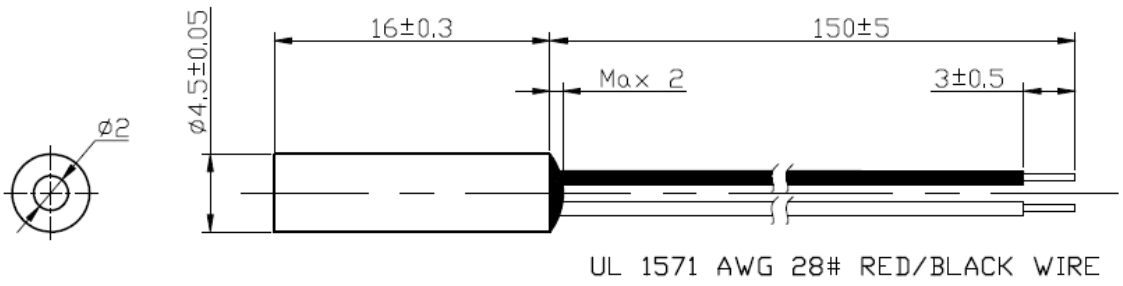

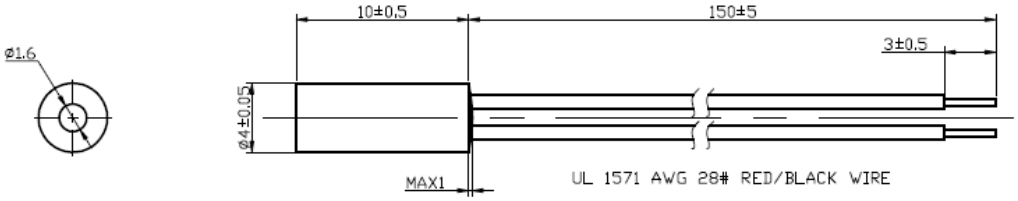


Spot size Define


S4 Series Dot Shape at 10m

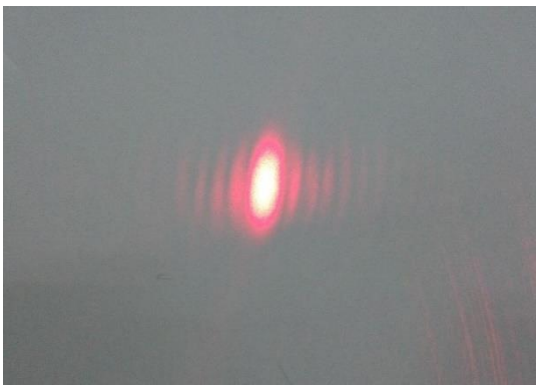

H4 Series Dot Shape at 10m

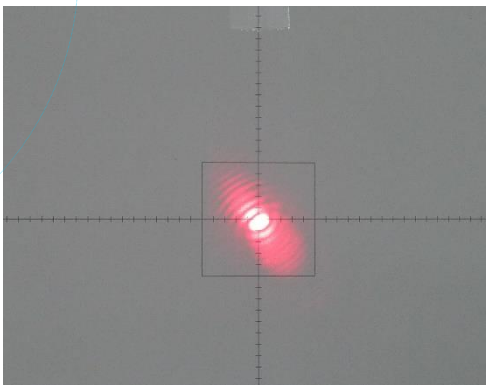

H4 Series Round Shape at 3m

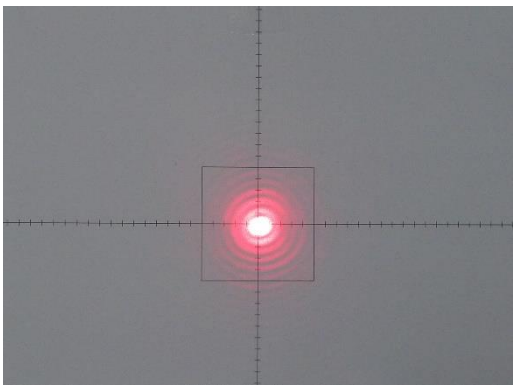

EGISMOS
www.egismos.com
tel:+1-360-3893347
sales@egismos.com

Spot size

The spot size defined as Gaussian beam. In optics, a Gaussian beam is a beam of electromagnetic radiation whose transverse electric field and intensity (irradiance) distributions are well approximated by Gaussian functions. Many lasers emit beams that approximate a Gaussian profile, in which case the laser is said to be operating on the fundamental transverse mode, or "TEM00 mode" of the laser's optical resonatoXr. When refracted by a diffraction-limited lens, a Gaussian beam is transformed into another Gaussian beam (characterized by a different set of parameters), which explains why it is a convenient, widespread model in laser optics.

Power Stability

The actual output power will between the range 2.5mW to 3.5mW, but once make sure the value, for example, 3mW±0.15mW or 3.2mW±0.16mW in the 25 ℃ temperature. Then the power stability represent 5%.

Mean time to failure(MTTF)

Mean time to failure (MTTF) is the length of time a device or other product is expected to last in operation. MTTF is one of many ways to evaluate the reliability of pieces of hardware or other technology. It's important to note, however, that the mean time to failure metrics provided by companies regarding specific products or components may not have been collected by running one unit continuously until failure. Instead, MTTF data is often collected by running many units, even many thousands of units, for a specific number of hours.

EGISMOS
www.egismos.com
tel:+1-360-3893347
sales@egismos.com

Laser Safety

The light emitted from these devices has been set in accordance with IEC60825. However, staring into the beam, whether directly or indirectly, must be avoided.

Class I

The maximum permissible exposure(MPE) cannot be exceeded, it includes High-power lasers within an enclosure that prevents exposure to the radiation and that cannot be opened without shutting down the laser. For example, a continuous laser at 600nm can emit up to 0.39mW, but for shorter wavelengths, the maximum emission is lower.

Class II

"Caution", visible laser light less than 1.0mW. Considered eye safe, normal exposure to this type of beam will not cause permanent damage to the retina.

Class IIIA

"Danger", visible laser light between 1.0mW and 5.0mW. Considered eye safe with caution. Focusing of this light into the eye could cause some damage.

Class IIIB

"Danger", infrared(IR), and high power visible lasers considered dangerous to the retina if exposed. NB: it is important to note that while complying with the above classifications, unless otherwise stated. Our laser diode products are not certified and are designed solely for use in OEM products. The way in which device is used in the final product may alter its original design classification, and it is the responsibility of the OEM to ensure compliance with the relevant standards.

EGISMOS
www.egismos.com
tel:+1-360-3893347
sales@egismos.com