

D6-4-980-100



Application

Laser Projector
Measuring equipment

Property

Wavelength λ = 980 nm
Output Power = 100 mW
Package Type = \varnothing 5.6mm

Introduction

Egismos currently markets AlGaAs infrared laser diodes in the 780nm ~ 1550nm wavelengths range. The low operating current and high temperature of the laser diodes are achieved through using misoriented substrate and MQW (Strain compensated) active layer. Egismos laser diodes are highly rated in a broad range of applications including, but not limited to, laser pointers, green lasers, blue laser DVD, laser barcode scanners, diode laser equipment, medical instruments and aerospace applications.

Red Laser Diode Key features


Absolute Maximum Rating at Tc=25°C

Items	Symbols	Values	Unit
Operating Current power	P_o	100	mW
Reverse Voltage	V_R	2	V
Operating Temperature	T_{case}	-10~+40	°C
Storage Temperature	T_s	-40~+85	°C



Electrical and Optical Characteristics at Tc=25°C

Item	Symbols	Min	Typ.	Max.	Unit	Condition
Threshold Current	I_{th}	-	40	50	mA	-
Operating Current	I_{op}	-	165	190	mA	Po=100mW
Operating Voltage	V_{op}	1	1.5	2.1	V	Po=100mW
Peak Wavelength	λ_p	970	980	990	nm	Po=100mW
Beam Divergence (FWHM)	θ_r	-	6	-	deg	Po=100mW
Beam Divergence (FWHM)	θ_{\pm}	27	32	37	deg	Po=100mW
Monitor Current	I_m	0.1	0.9	1.4	mA	Po=100mW

Package Drawing

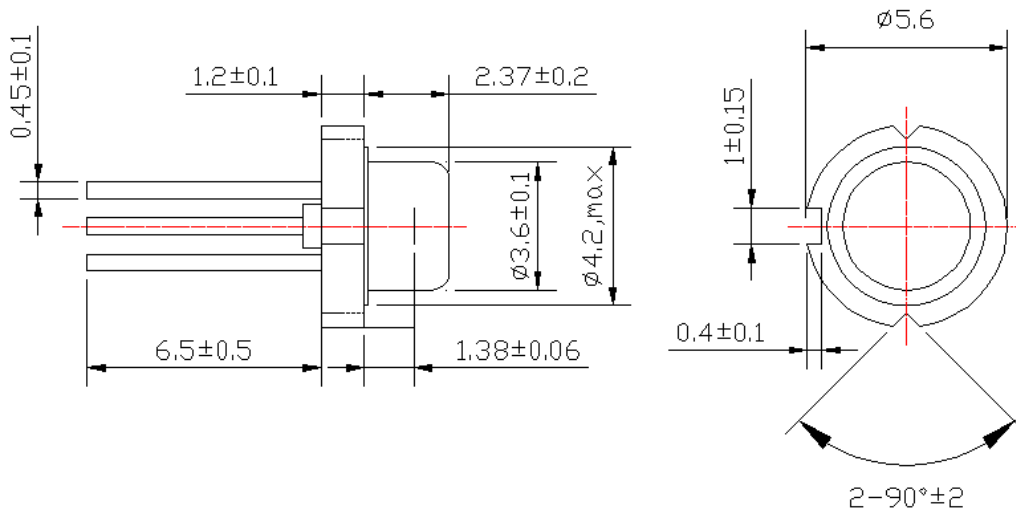

ELECTRICAL CONNECTION

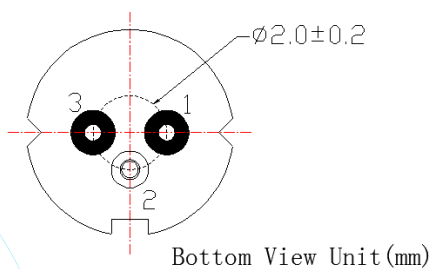

Specifications are subject to change without notice.

